
LE-1 BAND WEBBING SLING



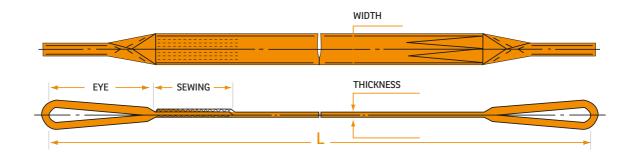

SPECIFICATIONS	
MATERIAL	100% HT POLYESTER WEBBING
STANDARD	EN 1492-1+A1
SAFETY FACTOR	7:1
BENEFITS / FEATURES	

HIGH QUALITY PRODUCT WITH THE 7:1 SAFETY FACTOR
PRODUCED FROM THE HIGH STRENGTH POLYESTER WEBBING
VARIOUS SIZES AVAILABLE FOR EVERY APPLICATION

NOT SLIPPERY

HIGH RESISTANCE TO CHEMICAL AND OIL CONTAMINATION CUSTOM MADE SLINGS FOR SPECIFIC APPLICATIONS MAY BE MADE TO CUSTOMER SPECIFICATIONS


VARIOUS COLOUR ARE AVAILABLE

OUR BAND WEBBING SLINGS ARE SOLD WITH HOOK BRAND HOOK $^{\circ}$ IS THE REGISTERED BRAND NAME OF KAYA GROUP

		Ů	4						
	WITH (mm)	! WORKING LOAD (kg 100 %)	WORKING LOAD (kg 80 %)	WORKING LOAD (kg 200 %)	ANGLE (0-45°) WORKING LOAD (kg)	ANGLE (45-60°) WORKING LOAD (kg)	BREAKING LOAD (kg)	WORKING LOAD (kg)	LENGTH (m)
VIOLET	30-50	1000	800	2000	1400	1000	7000	1000	1-10
GREEN	70	2000	1600	4000	2800	2000	14000	2000	2-10
YELLO!	N 90	3000	2400	6000	4200	3000	21000	3000	2-10
GREY	120	4000	3200	8000	5600	4000	28000	4000	4-10
RED	150	5000	4000	10000	7000	5000	35000	5000	4-10
BROW	180	6000	4800	12000	8400	6000	42000	6000	4-10
BLUE	250	8000	6400	16000	11200	8000	56000	8000	5-10
ORANG	300	10000	8000	20000	14000	10000	70000	10000	5-10

1. FLAT EYE	U	0° 100%	Δ	60° 85%
2. REVERSED EYE 3. FOLDED EYE 1/2 WIDTH FROM 1 SIDE	Δ	30° 95%	Δ	90° 70%
4. FOLDED EYE 1/2 WIDTH FROM 2 SIDES	Λ	45°		120° 50%
5. FOLDED EYE 1/3 WIDTH		90%		50%

LE-2 ROUND WEBBING SLING

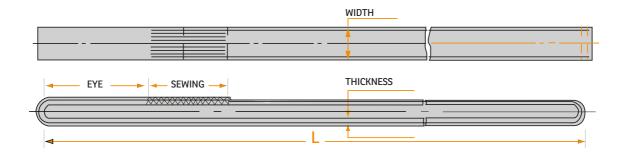

SPECIFICATIONS					
MATERIAL 100% HT POLYESTER WEBBING					
STANDARD	EN 1492-2+A1				
SAFETY FACTOR	7:1				
BENEFITS / FEATURES					
HIGH QUALITY PRODUCT WITH	THE 7:1 SAFETY FACTOR				
PRODUCED FROM THE HIGH STRENGTH POLYESTER WEBBING					
VARIOUS SIZES AVAILABLE FOR EVERY APPLICATION					
NOT SLIPPERY					
HIGH RESISTANCE TO CHEMICAL AND OIL CONTAMINATION					
CUSTOM MADE SLINGS FOR SPECIFIC APPLICATIONS MAY BE MADE TO CUSTOMER					
SPECIFICATIONS					
VARIOUS COLOUR ARE AVAILABLE					
OUR ROUND WEBBING SLINGS ARE SOLD WITH HOOK BRAND					
HOOK® IS THE REGISTERED BRA	ND NAME OF KAYA GROUP				



			2						
	WITH (mm)	WORKING LOAD (kg 100 %)	WORKING LOAD (kg 80 %)	WORKING LOAD (kg 200 %)	ANGLE (0-45°) WORKING LOAD (kg)	ANGLE (45-60°) WORKING LOAD (kg)	BREAKING LOAD	WORKING LOAD (kg)	LENGTH (m)
VIOLET	25	1000	800	2000	1400	1000	7000	1000	1-10
GREEN	50	2000	1600	4000	2800	2000	14000	2000	2-10
YELLOW	75	3000	2400	6000	4200	3000	21000	3000	2-10
GREY	100	4000	3200	8000	5600	4000	28000	4000	4-10
RED	125	5000	4000	10000	7000	5000	35000	5000	4-10
BROWN	150	6000	4800	12000	8400	6000	42000	6000	4-10
BLUE	200	8000	6400	16000	11200	8000	56000	8000	5-10
ORANGE	250	10000	8000	20000	14000	10000	70000	10000	5-10

U	0° 100%	Δ	60° 85%
Δ	30° 95%		90° 70%
Δ	45° 90%	_	120° 50%