


SPINNAKER PEEL

Linked Shackles

WELDED RING VERSION

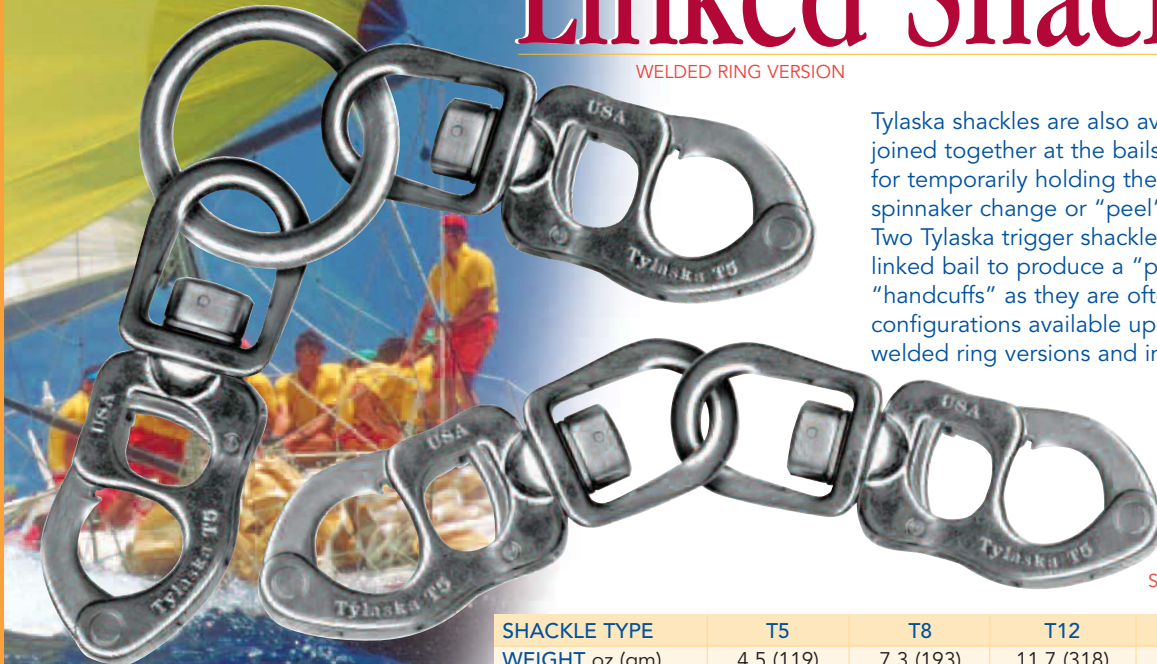

Tylaska shackles are also available as a stock item joined together at the bails. This arrangement is ideal for temporarily holding the guy during a running spinnaker change or "peel" as it is sometimes called. Two Tylaska trigger shackles are then fitted to the linked bail to produce a "peeling strop" or "handcuffs" as they are often nicknamed. Other configurations available upon request including welded ring versions and individual linked bails.


STANDARD VERSION

SHACKLE TYPE	T5	T8	T12	T20	T30
WEIGHT oz (gm)	4.5 (119)	7.3 (193)	11.7 (318)	23.8 (676)	52.9 (1,273)
WORK LOAD lb (kg)	2,500 (1,136)	4,000 (1,818)	6,000 (2,727)	10,000 (4,545)	15,000 (6,818)
BREAKING STRENGTH lb (kg)	5,000 (2,273)	8,000 (3,636)	12,000 (5,455)	20,000 (9,091)	30,000 (13,636)


TACK SHACKLE

X8A

Revolutionary new design actually sews into the tack of a jib in place of a sail ring! Much easier to install than normal snap shackles without the need for extensive lashing. Mounting lugs formed into sides of shackle allow it to be easily sewn into sail tack, firmly securing shackle to sail to prevent shifting and twisting that occurs with regular shackles. Standard 1" webbing fits snugly into rounded lugs to prevent chafing. Releasable under load. Lanyard line or webbing can be looped through trigger hole for "stoop free" easy release.

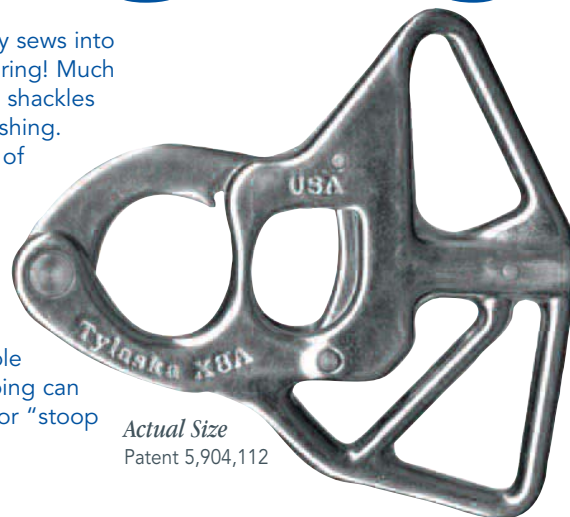

Actual Size
Patent 5,904,112



SHACKLE TYPE	X8A Sew In
A in (mm)	1 ¹ / ₁₆ (17.5)
B in (mm)	2 ¹ / ₃₂ (16.7)
C in (mm)	1 ³ / ₁₆ (20.6)
D in (mm)	2 ¹ / ₁₆ (68.3)
E in (mm)	2 ⁷ / ₈ (73)
WEIGHT oz (gm)	3.6 (94)
WORK LOAD lb (kg)	4,000 (1,818)
BREAKING STRENGTH lb (kg)	8,000 (3,636)

- Easy to Install
- One Hand Operation
- Releasable Under Load
- 8,000 lb Break Strength
- Fits Standard 1" Webbing
- Stays in Place without Shifting