

## ROPE CLUTCHES


### Maximum performance and minimum friction with Rutgerson's rope clutches.

Rutgerson rope clutches can take much higher loads than equivalent sizes of other manufacturers on the market due to a unique combination of clever construction and high-quality materials. The housing is made of a black high-tech composite of high strength, whereas the other parts are made of either anodized aluminium or stainless steel. Due to the construction of the product, our rope clutches are suitable for boats up to 42ft.

Our rope clutches have a clever solution for endless lines. Due to the fact that the housing can easily be removed from the mounting plate, the rope clutch can quickly be mounted on or detached from endless lines such as furling lines. The rope clutch is the only one that can be mounted by one person on the deck. Additionally, with a wide range of rope dimensions between 6 and 16mm, the Rutgerson rope clutches are incredibly flexible.

The modern, compact design of Rutgerson's rope clutches ensures a neat mounting in line with modern deck layouts. The streamlined design dramatically reduces the risk of problems with tangled ropes. The Black Line rope clutches have no sharp corners or obstructions that could catch the rope.

You will find that the handling of the lines much easier with our rope clutches. This is because it is the only rope clutch on the market fitted with an integrated low-friction sheave, which ensures that the rope runs smoothly - both when winching and when trimming by hand. Don't have to be straight behind! No additional products with furling genoa, even standing in the cockpit! Naturally, the clutch allows continued trimming of the rope even when it is locked.

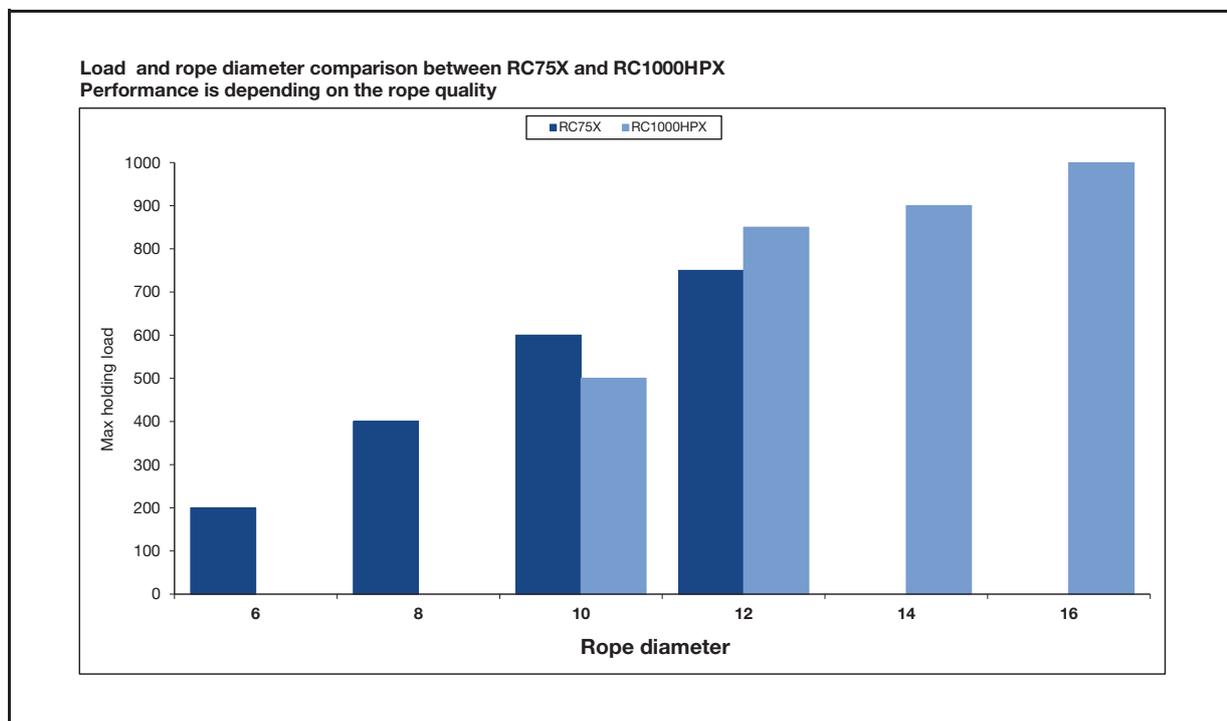

## Rope Clutch RC75X



S600701



S600702



S600703

### Rope clutches RC75X

| Part No | Product description      | A           | B          | C           | Max load [kg] | Rope dimensions [mm] | D x E              | Weight [gr] |
|---------|--------------------------|-------------|------------|-------------|---------------|----------------------|--------------------|-------------|
|         |                          | Height [mm] | Width [mm] | Length [mm] |               |                      |                    |             |
| S600701 | Single rope clutch RC75X | 70          | 39         | 139         | 750           | 8 - 12               | 79 (M6 bolts)      | 352         |
| S600702 | Double rope clutch RC75X | 70          | 66         | 139         | 750           | 8 - 12               | 79 x 28 (M6 bolts) | 618         |
| S600703 | Triple rope clutch RC75X | 70          | 94         | 139         | 750           | 8 - 12               | 79 x 28 (M6 bolts) | 894         |

## Rope Clutch RC1000



S601501




S601502



S601503

### Rope clutches RC1000

| Part No | Product description       | A           | B          | C           | Max load [kg] | Rope dimensions [mm] | D x E              | Weight [gr] |
|---------|---------------------------|-------------|------------|-------------|---------------|----------------------|--------------------|-------------|
|         |                           | Height [mm] | Width [mm] | Length [mm] |               |                      |                    |             |
| S601501 | Single rope clutch RC1000 | 81          | 38         | 160         | 1000          | 10-16                | 85 (M6 bolts)      | 504         |
| S601502 | Double rope clutch RC1000 | 81          | 73         | 160         | 1000          | 10-16                | 85 x 32 (M6 bolts) | 934         |
| S601503 | Triple rope clutch RC1000 | 81          | 102        | 160         | 1000          | 10-16                | 85 x 32 (M6 bolts) | 1385        |

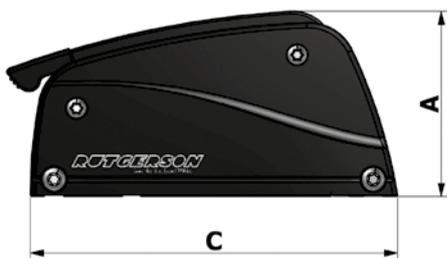

#### Core benefits

- Superior working load
- Easy and clever mounting
- Elegant design
- Minimum friction