

Easily spliced onto Genoa sheets, outhauls and halyards, the low-profile Tylaska J-Locks fit through most Genoa blocks for fast sheet changes. Unique patented double-locking plunger locks in two directions for the ultimate in flog-free operation.

# J-LOCK Shackles

### UNLOCKED POSITION

J-Lock opens only when the knob is rotated so that its notch is aligned with the body's tab.







### LOCKED POSITION


The notch in the knob is turned away from the tab on the body and seated on the keyway shown below.



Keyway prevents knob from rotating.

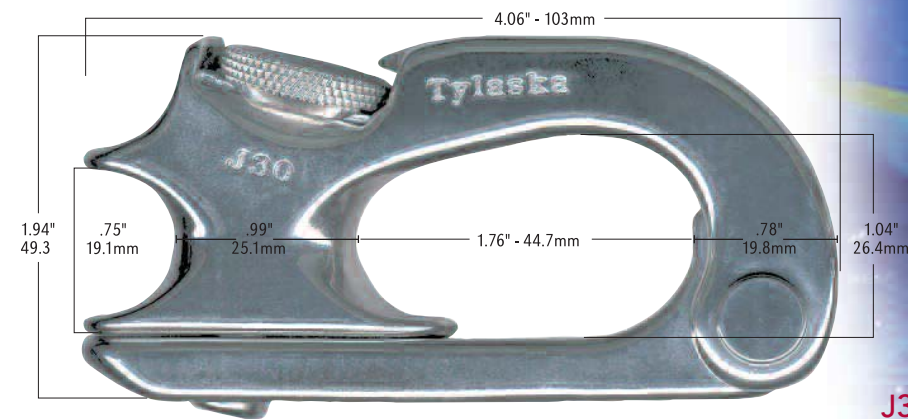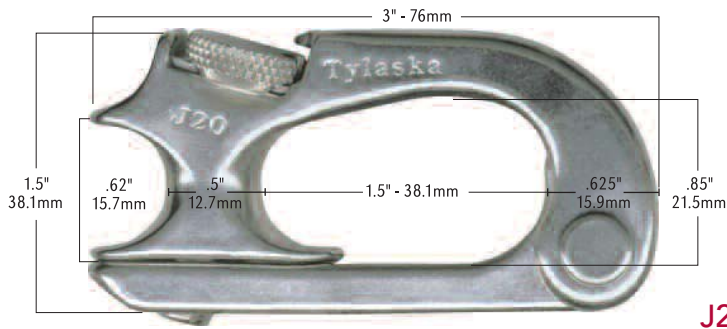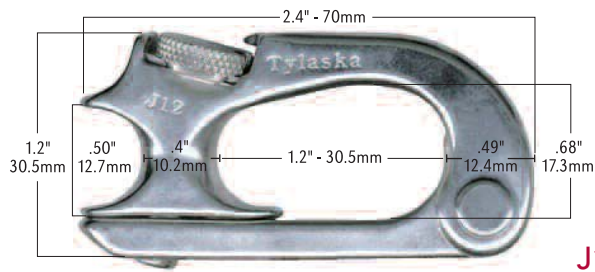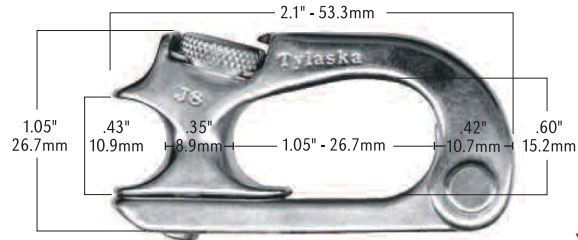



J-Locks Shown Actual Size Patent 6,539,885

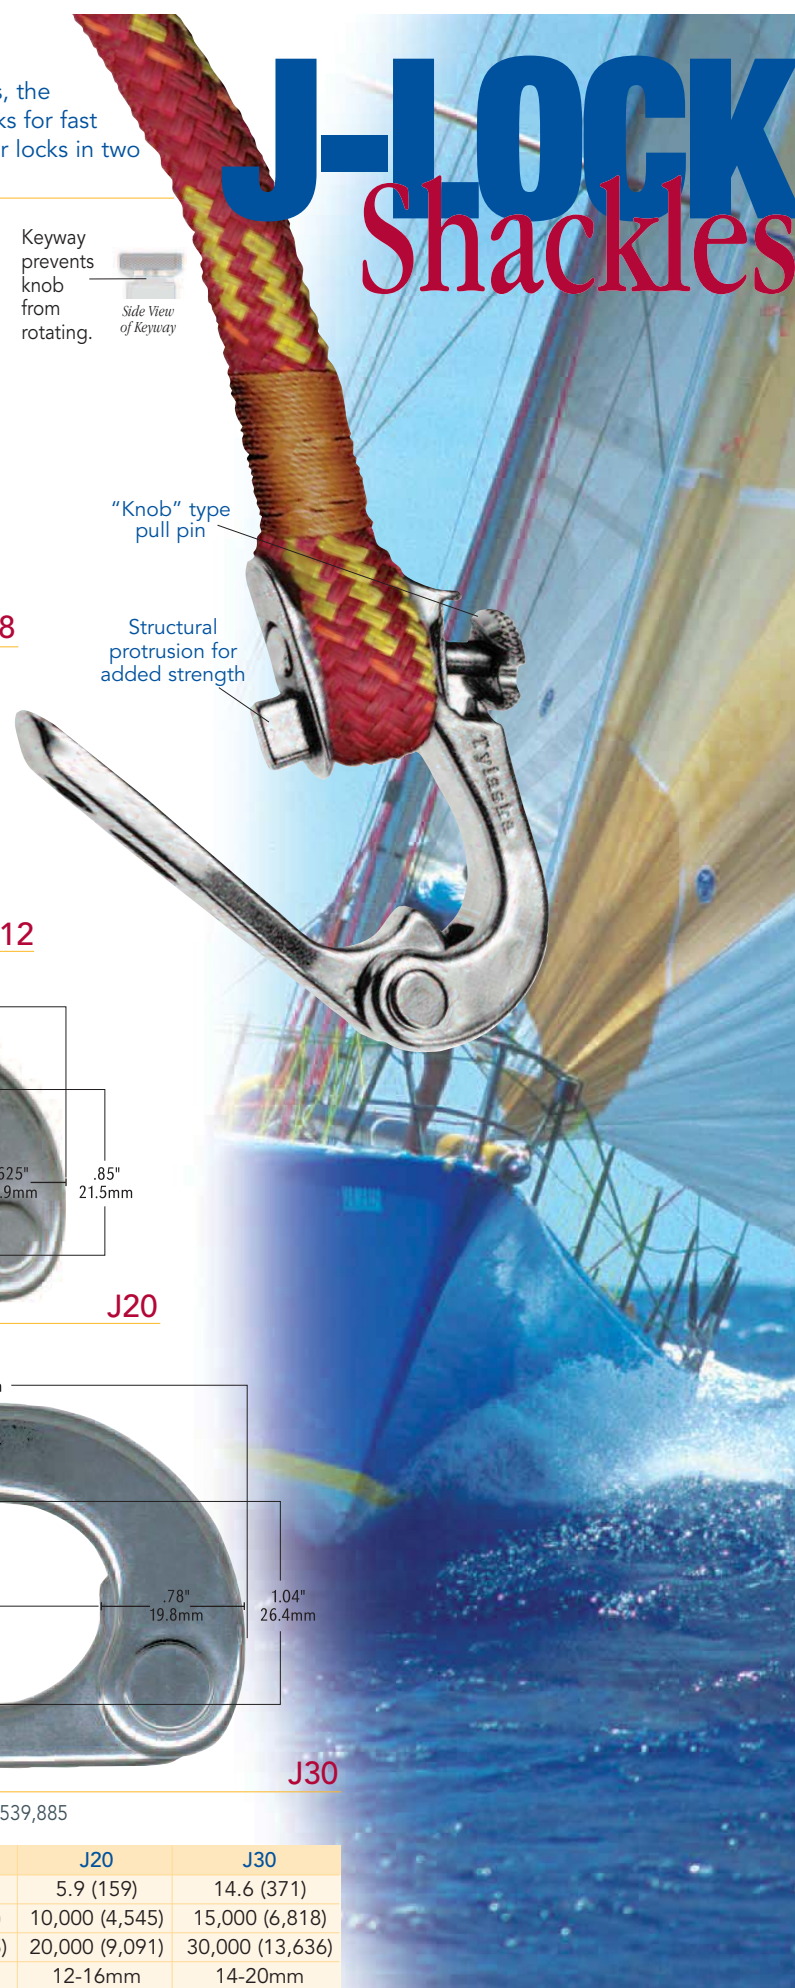

SHACKLE TYPE	J8	J12	J20	J30
WEIGHT oz (gm)	1.9 (54)	3.0 (82)	5.9 (159)	14.6 (371)
WORK LOAD lb (kg)	4,000 (1,818)	6,000 (2,727)	10,000 (4,545)	15,000 (6,818)
BREAKING STRENGTH lb (kg)	8,000 (3,636)	12,000 (5,455)	20,000 (9,091)	30,000 (13,636)
LINE SIZE	8-10mm	10-12mm	12-16mm	14-20mm

# PRESS LOCK

As an alternative to Tylaska's J-Lock style shackle, the press lock serves the same purpose with a different design. Two opposing triggers are pressed to open the shackle. Both opposing triggers must be pressed at the same time to open the shackle which safeguards against accidental opening during flogging. Investment cast and then hipped in aerospace 17-4PH stainless, the Press Lock Junior and Senior are held to the same high standards as our snap shackles. Designed to be strong and light, yet provide easy use in those tight mark roundings, they have proven to be up to the task. Their opposing trigger mechanism is ideal for sheets and other applications requiring a fitting small enough to pass through the lead cars to make re-leading a sheet easier. They are also used for halyards, outhauls and lead changers.

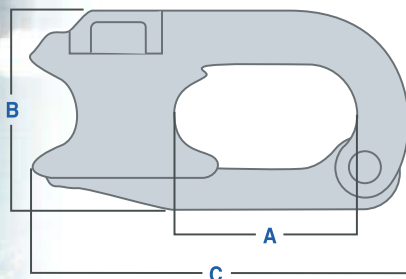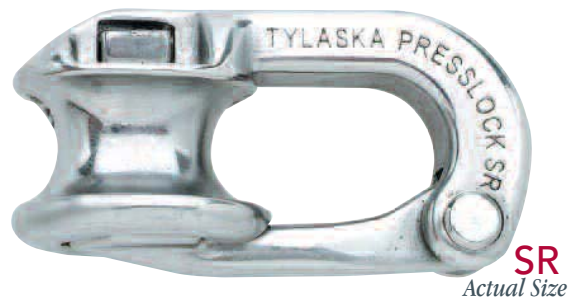

The Press Lock Junior is perfect for boats 24 to 40 feet LOA and has been seen widely on the Farr 40s. The Press Lock Senior also is a tried and true veteran. Commonly found on America's Cup boats and maxi boats, these have stood the test of time. These shackles can cover boats from 40 to 80 feet LOA.

PRESS LOCK	A in	B in	C in	WEIGHT oz	WORK LOAD lb	BREAKING STRENGTH	MAX LINE SIZE
Press Lock Jr	1.250	1.000	2.312	2.3	4,650	9,300 lb	3/8"
Press Lock Sr	1.250	1.375	2.750	5.8	10,000	20,000 lb	5/8"

# SP6

Tylaska has revived the old and proven trigger release snap shackle from races of the past. New molds, closer tolerances and some needed design modifications have allowed the #6 to breath new life and once again sail with the best. Now called the Tylaska SP6, this is the same shackle that has had its place in every major yachting event since its creation. This light, strong and reliable shackle has been the solution on boats up to 50 ft. Made from the same durable 17-4PH stainless as before, the castings are now hipped to create a finished part similar to a forging in strength and metal consistency.

